





apparecchio di illuminazione a binario per interni IP20. realizzato con faretto in alluminio orientabile su tre assi, con dettaglio in ottone naturale che segna lo snodo sferico dell'attacco tra la tige, che permette la rotazione sull'asse verticale di 360°, e la maniglia, che ne permette un'agevole orientabilità. per ottenere un ottimo comfort visivo è inclusa una trappola di luce nella parte inferiore del gruppo ottico.
dimensioni: adattatore 37x198mm, tige 190mm, faretto diametro Ø55mm h.141mm. cablato con sorgente elettronica 2700K, 3000K e 3000Vb K (progettato per il settore alta moda) Ra98 les9 19,5W 1110lm e les19 14W 1580lm. ottiche: 18° 40° 58° alimentatore 240V 50-60Hz incluso.
finiture: my bianco, nero55, cromo lucido.



IP20 rated track light fitting for indoor use.
made of an aluminium spotlight adjustable on three axes, mounted on a track with a natural brass hinge detail that marks the spherical joint between the joint of the rod, which ables the rotation on the 360° vertical axis, and the handle, which permits an easy adjustment. a light trap is included at the bottom of the spotlight for an optimal visual comfort.
sizes: adapter 37x198mm, rod 190mm, spotlight diameter Ø55mm h.141mm. wired with 2700K, 3000K and 3000Vb K (designed for high fashion industry) Ra98 led source with les9 19.5W 1110lm and les19 14W 1580lm. optics: 18° 40° 58° 240V 50-60Hz power supply included.
finishes: my bianco, nero55, polished chrome.

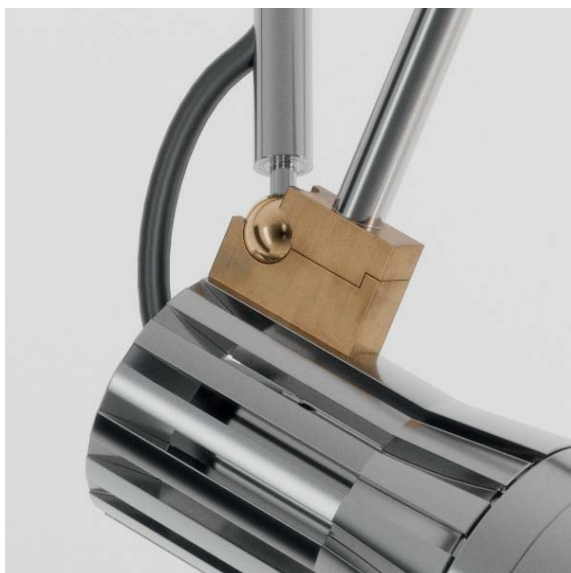



dca binario		240V 50-60Hz		A	IP20	CE	i
Vb7.220.75.27	my bianco	adattatore bianco		2700K	18°	1,2	
		white adaptor					
Vb7.220.76.27	nero55	adattatore nero		2700K	18°	1,2	
		black adaptor					
Vb7.220.78.27	cromo lucido	adattatore nero		2700K	18°	1,2	
	polished chrome	black adaptor					

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	A
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe000	les9 ●	Ta25 °C		vita media · average life			70000 h	L80	B10	

Vb7.220.75.30	my bianco	adattatore bianco		3000K	18°	1,2	
		white adaptor					
Vb7.220.76.30	nero55	adattatore nero		3000K	18°	1,2	
		black adaptor					
Vb7.220.78.30	cromo lucido	adattatore nero		3000K	18°	1,2	
	polished chrome	black adaptor					



Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	A
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe001	les9 ●	Ta25 °C		vita media · average life			70000 h	L80	B10	

Vb7.220.75.30v	my bianco	adattatore bianco		3000VbK	18°	1,2	
		white adaptor					
Vb7.220.76.30v	nero55	adattatore nero		3000VbK	18°	1,2	
		black adaptor					
Vb7.220.78.30v	cromo lucido	adattatore nero		3000VbK	18°	1,2	
	polished chrome	black adaptor					


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	A
98	98	Rf 93	Rg 106	step 1	700	27,9	1110	19,5	57	A
xe007	les9 ●	Ta25 °C		vita media · average life			70000 h	L80	B10	

dca binario 18°

gradi di apertura fascio luminoso
beam's angle degrees






gradi di rotazione · rotation degrees




dca binario 40°

gradi di apertura fascio luminoso
beam's angle degrees



gradi di rotazione · rotation degrees



dca binario 240V 50-60Hz

Vb7.220.81.27	my bianco	adattatore bianco white adaptor	2700K 40° 1,2
Vb7.220.82.27	nero55	adattatore nero black adaptor	2700K 40° 1,2
Vb7.220.84.27	cromo lucido polished chrome	adattatore nero black adaptor	2700K 40° 1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm000	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		

Vb7.220.81.30	my bianco	adattatore bianco white adaptor	3000K 40° 1,2
Vb7.220.82.30	nero55	adattatore nero black adaptor	3000K 40° 1,2
Vb7.220.84.30	cromo lucido polished chrome	adattatore nero black adaptor	3000K 40° 1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm001	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		




Vb7.220.81.30v	my bianco	adattatore bianco white adaptor	3000VbK 40° 1,2
Vb7.220.82.30v	nero55	adattatore nero black adaptor	3000VbK 40° 1,2
Vb7.220.84.30v	cromo lucido polished chrome	adattatore nero black adaptor	3000VbK 40° 1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,9	1580	14,0	113	A+
xm007	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		




dca binario 58°

gradi di apertura fascio luminoso
beam's angle degrees



gradi di rotazione · rotation degrees



dca binario 240V 50-60Hz

Vb7.220.91.27	my bianco	adattatore bianco white adaptor	2700K	58°	1,2
Vb7.220.92.27	nero55	adattatore nero black adaptor	2700K	58°	1,2
Vb7.220.94.27	cromo lucido polished chrome	adattatore nero black adaptor	2700K	58°	1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm000	les19	● Ta25 °C	vita media · average life		70000 h	L80		B10		

Vb7.220.91.30	my bianco	adattatore bianco white adaptor	3000K	58°	1,2
Vb7.220.92.30	nero55	adattatore nero black adaptor	3000K	58°	1,2
Vb7.220.94.30	cromo lucido polished chrome	adattatore nero black adaptor	3000K	58°	1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm001	les19	● Ta25 °C	vita media · average life		70000 h	L80		B10		


Vb7.220.91.30v	my bianco	adattatore bianco white adaptor	3000VbK	58°	1,2
Vb7.220.92.30v	nero55	adattatore nero black adaptor	3000VbK	58°	1,2
Vb7.220.94.30v	cromo lucido polished chrome	adattatore nero black adaptor	3000VbK	58°	1,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,9	1580	14,0	113	A+
xm007	les19	● Ta25 °C	vita media · average life		70000 h	L80		B10		







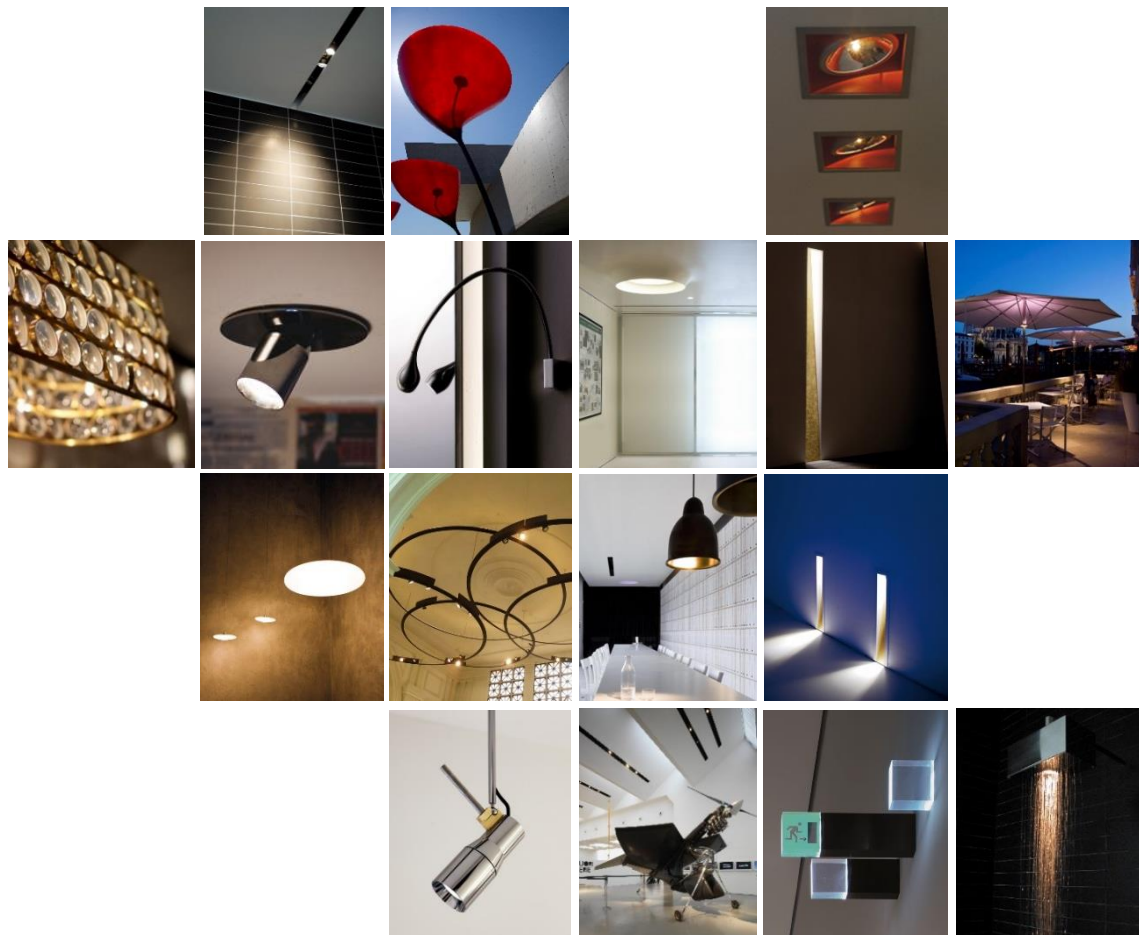

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

