




**apparecchio di illuminazione a sospensione per interni IP20.  
realizzato in alluminio anodizzato e vetro di murano lavorato a mano da maestri vetrai con  
particolare finitura velata.  
dimensioni diametro Ø850mm h.90mm, cavo di alimentazione 2x0,75mm<sup>2</sup> e tre cavi di  
sospensione in acciaio inox 3000mm inclusi.  
cablato con sorgente elettronica lineare 2700K Ra95 96W per luce diretta e 6x23,5W per  
luce indiretta.  
alimentatore 240V 50-60Hz incluso, da installare remoto.  
finiture: ottone ap-s**

**IP20 rated suspension light fitting for indoor use.  
made of oxidised aluminium and hand made murano glass by glass maker masters with  
particular veiled finish.  
diameter Ø850mm h.90mm, 2x0,75mm<sup>2</sup> power cable and three stainless steel suspension  
cables 3000mm included.  
wired with 2700K Ra95 96W linear led source for direct light and 6x23,5W for indirect  
light.  
240V 50-60Hz power supply included, to be installed remotely.  
finishes: ottone ap-s**





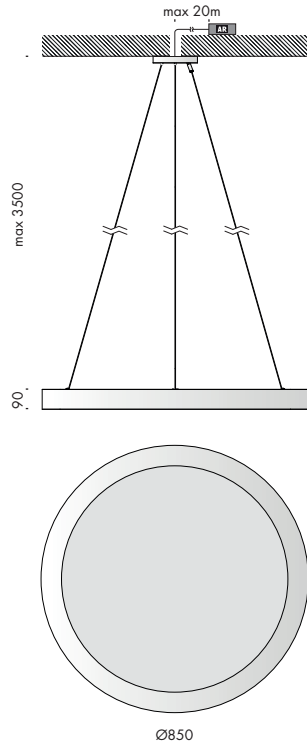

accademi sospensione

240V 50-60Hz



IP20



Vb8.637.01

ottone ap-s

2700K

l.d. 96W Ø850mm 7

l.i. 6x23,5W

**l.d. (luce diretta - direct light)**

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm	W	lm/W	
95	90	Rf 90	Rg 98	step 2	48	9216	96	96	<b>A+</b>
Vz052-2		Ta25 °C		vita media · average life		50000 h	L80 B10		


**l.i. (luce indiretta - indirect light)**

Ra	ies tm-30		sdc	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	48	17776	141	126	<b>A+</b>
cm001-6	les19 ● Ta25 °C		vita media · average life		50000 h	L80 B10		







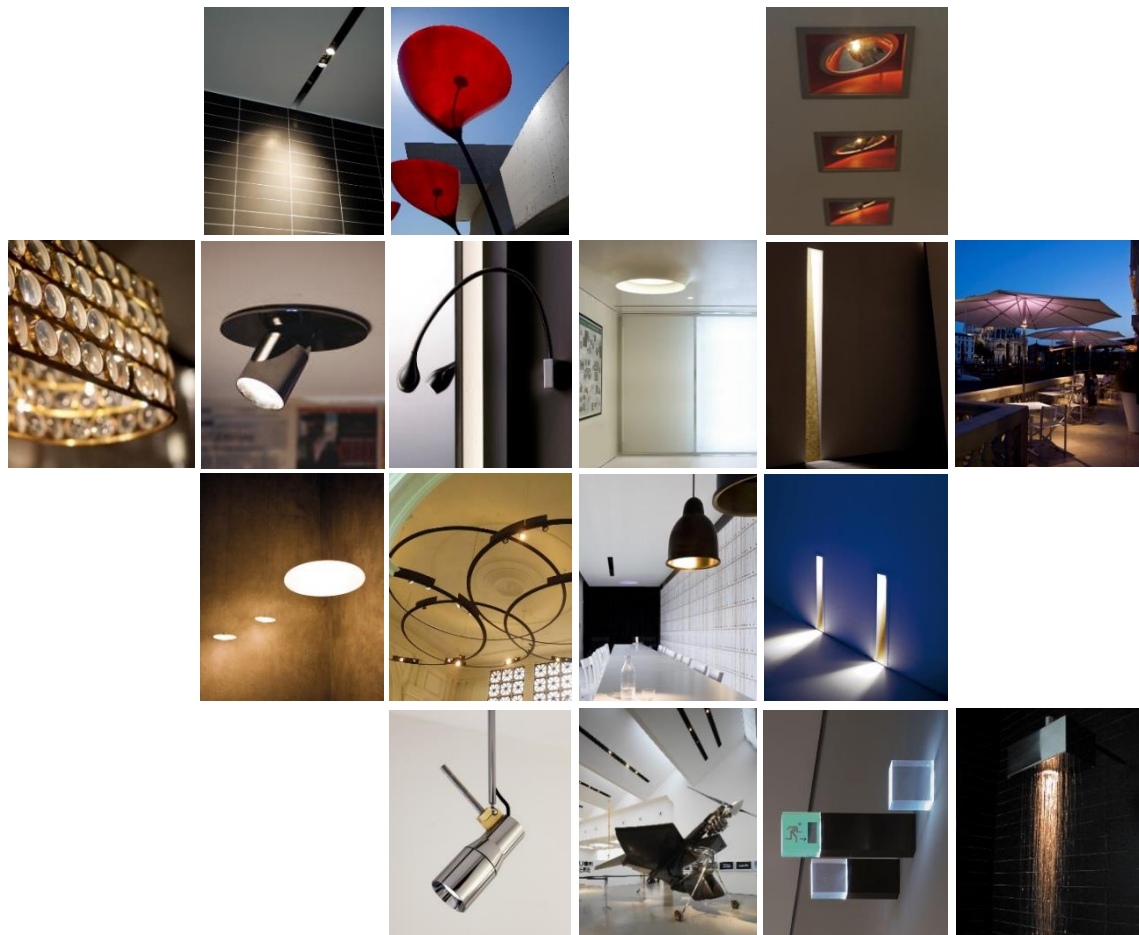

Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

