



apparecchio di illuminazione per interni ed esterni IP44. realizzato in alluminio ossidato e verniciato a polvere, dimensioni 240x220x120mm, da installare su catene di sezione massima 50x50mm tipiche delle arcate o a parete tramite apposita staffa di fissaggio.

cablato con sorgente elettronica 3000K 8W 813lm per luce diretta e sorgente elettronica 3000K Ra97 26,1W 2011lm per luce indiretta. ottiche: luce indiretta diffusa, luce diretta 20°.

alimentatori 220-240V 50-60Hz inclusi predisposti per 2 accensioni separate.

accessori: staffa di fissaggio a parete.

finiture: bruno antico, nero notte, scurodivals, grigio argento.




IP44 rated light fitting for indoor and outdoor use. made of oxidised and powder coated aluminium (240x220x120mm) to be installed on chains having a max. section of 50x50mm that are typical of arches or for wall mounting using the fixing bracket provided. wired with 3000K 8W 813lm led source for direct light and 3000K Ra97 26,1W 2011lm led source for indirect light.

optics: diffused indirect light, 20° direct light.

220-240V 50-60Hz power supplies included designed for 2 separate switches.

accessories: wall fixing bracket. finishes: antique brown, night black, scurodivals and silver grey.



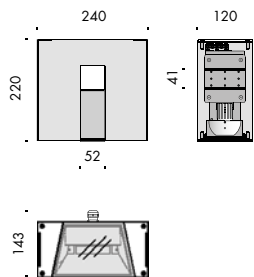



cafena		220-240V 50-60Hz		A	IP44	CE	i
Vb8.119.01	bruno antico · antique brown	2700K	l.d. 20°	3,8			
			l.i. diffusa · diffused				
Vb8.119.03	nero notte · night black	2700K	l.d. 20°	3,8			
			l.i. diffusa · diffused				
Vb8.119.05	scurodivals	2700K	l.d. 20°	3,8			
			l.i. diffusa · diffused				
Vb8.119.07	grigio argento · silver grey	2700K	l.d. 20°	3,8			
			l.i. diffusa · diffused				

I.d. (luce diretta · direct light)

Ra	ies tm-30		sdcm	mA	V _f (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	12,0	813	8	102	A
ce031	les9	Ta25 °C	vita media · average life	50000 h	L70	B10			

I.i. (luce indiretta · indirect light)

Ra	R9	ies tm-30		sdcm	mA	V _f (min)	lm	W	lm/W	
97	90	Rf 96	Rg 100	step 2	1050	24,9	2011	26,1	77	A
dz011	10	Ta25 °C	vita media · average life	50000 h	L80	B10				








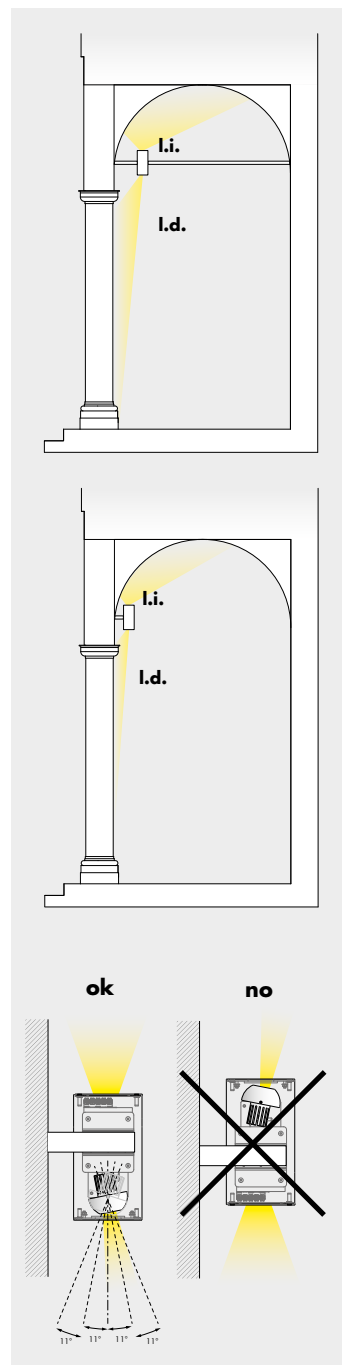


staffa fissaggio a parete. wall fixing bracket.		CE	i
Vb8.119.81	bruno antico · antique brown		1
Vb8.119.83	nero notte · night black		1
Vb8.119.85	scurodivals		1
Vb8.119.87	grigio argento · silver grey		1






interasse fori per installazione · installation hole distance

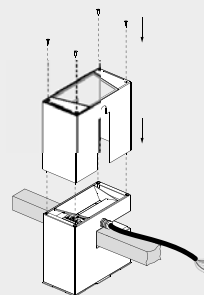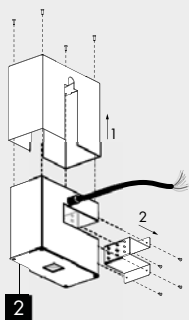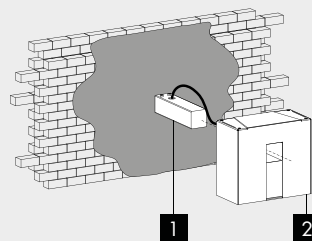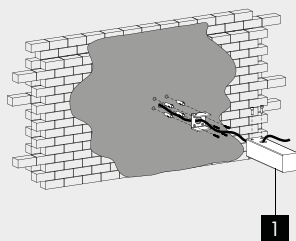

1 Vb8.119.81/83/85/87

2 Vb8.119.01/03/05/07

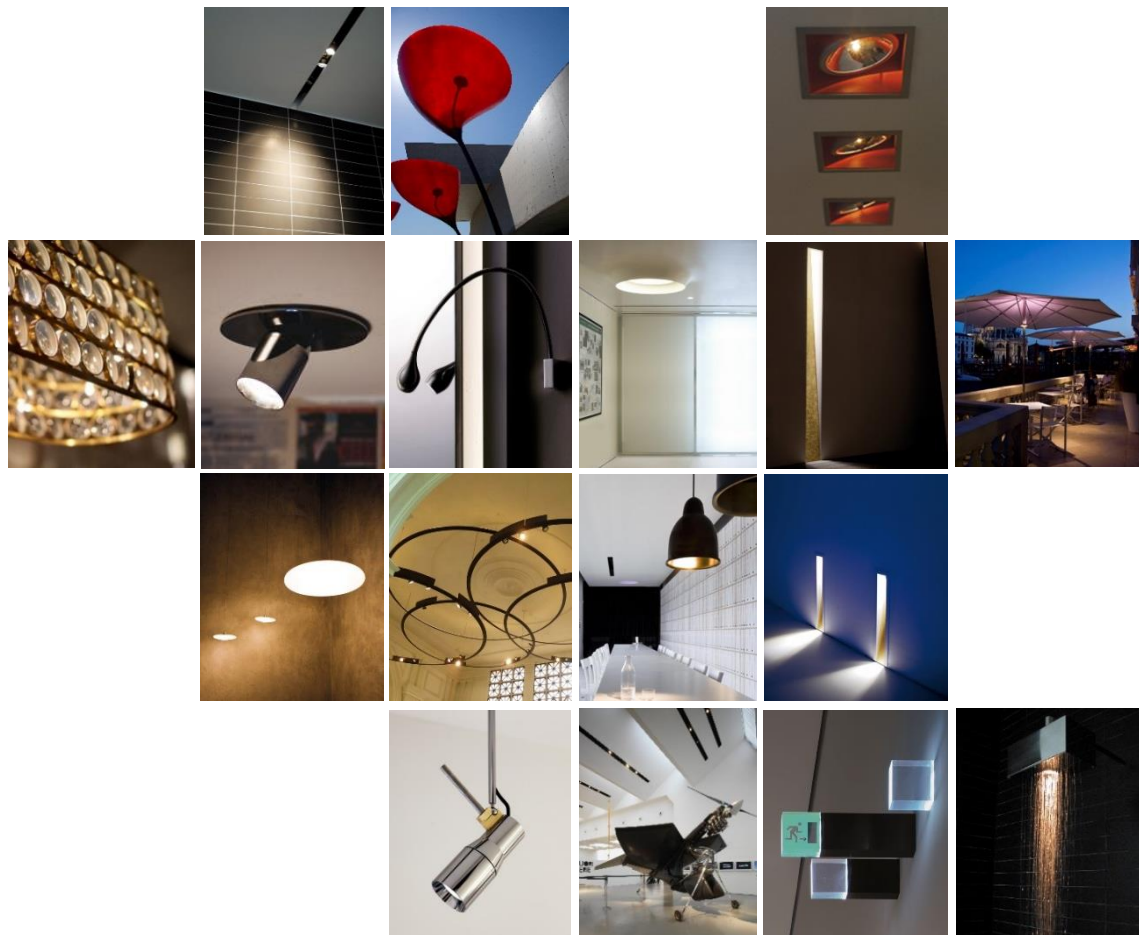

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

