



**apparecchio di illuminazione per esterni IP65.**

**realizzato con tubo in acciaio trafilato diametro alla base Ø153mm verniciato a polvere.**

**il palo di dimensioni 1125x300mm h.5200mm fuori terra è dotato di morsettiera a scomparsa ispezionabile e si sviluppa in un unico elemento sagomato alla sommità.**

**cablato con sorgente elettronica 3000K 36W 4338lm, con vetro trasparente e ottica 35° oppure con vetro trasparente e ottica ellittica 23°x80°.**

**alimentatore 240V 50-60Hz, integrato.**

**finiture: bruno antico, nero notte, scurodivals e grigio argento.**


**IP65 rated light fitting for outdoor use.**

**made of powder coated drawn diameter at the base Ø153mm steel tube. the pole sized 1125x300mm and h.5200mm above ground is equipped with a fully concealed accessible terminal block and is made of a single element with a shaped end.**

**wired with 3000K 36W 4338lm led source, with transparent glass and 35° optics or with transparent glass and 23°x80° elliptical optics. 240V 50-60Hz power supply included.**

**finishes: antique brown, night black, scurodivals and silver grey.**




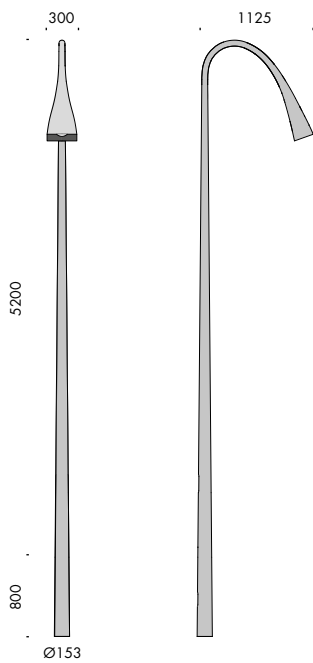


## sentiero di vals



CE i

- f4.183.01** bruno antico · antique brown 70
- f4.183.03** nero notte · night black 70
- f4.183.05** scurodivals 70
- f4.183.07** grigio argento · silver grey 70



kit	240V 50/60Hz	A	K	IP65	△	CE	i
<b>Vb9.183.81</b> vetro trasparente transparent glass		3000K	3x12W	35°	4,4		
<b>Vb9.183.75</b> vetro trasparente with clear glass		3000K	3x12W	23x80°	4,4		

Ra	ies tm-30		sdc	mA	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	51,6	4338	36	120	<b>A++</b>
ce021-3	Ta25 °C		vita media · average life	50000 h	L80	B10			









Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

