



**apparecchio di illuminazione da terra IP20, terra soffitto e sospensione IP40 per interni. realizzato in estruso di alluminio ossidato e verniciato a polvere di sezione triangolare 50x90mm.**

**modelli:**

**16.64 terra 01 710x330x2168mm monoemissione cablato con sorgente elettronica 3000K 72W 7200lm per luce indiretta.**

**16.64 terra 02 710x330x2168mm biemissione completa di sorgenti elettroniche 3000K 54W 5400lm per luce indiretta e 15W 1500lm per luce diretta con ottica dark light.**

**alimentatore 240V 50-60Hz incluso.**

**16.64 terra soffitto h.2400mm, h.2700mm e h.3000mm; orientabile di 355°**

**sull'asse verticale.**

**cablato con sorgente elettronica lineare con limitatore di corrente integrato 3000K Ra95 fino a 39W 3744lm. alimentatore in tensione costante 24Vdc escluso,**

**da installare remoto.**

**componenti: coppia di boccole.**

**16.64 sospensione 01 90x3000x650mm completo di tige di sospensione, cablato con sorgente elettronica 3000K Ra95 76W 7296lm luce diretta.**

**16.64 sospensione 02 210x3000x600mm completo di tige sospensione, cablato con sorgente elettronica 3000K Ra95 152W 14592lm luce diretta, 56W 5376lm luce indiretta.**

**alimentatore 240V 50-60Hz incluso.**

**finiture: bianco V.**

**IP20 rated floor-standing and IP40 rated floor-standing, ceiling and suspension light fitting for indoor use.**

**made of oxidised and powder coated extruded aluminium having a 50x90mm triangular section.**

**versions:**

**16.64 terra 01 710x330x2168mm unidirectional version wired with 3000K 72W 7200lm led source for indirect light.**

**16.64 terra 00 710x330x2168mm bi-directional version 3000K with 54W 5400lm led source for indirect light and 15W 1500lm led source for direct light with dark light optics.**

**240V 50-60Hz power supply included.**

**16.64 terra soffitto h.2400mm, h.2700mm and h.3000mm; adjustable by 355° on the vertical axis.**

**wired with 3000K Ra95 up to 39W 3744lm linear led source with integrated current limiter. 24Vdc constant voltage power supply not included, to be installed remotely. components: bushes pair.**


**16.64 sospensione 01 90x3000x650mm with suspension rods, wired with 3000K Ra95 76W 7296lm led source for direct light.**

**16.64 sospensione 02 210x3000x600mm with suspension rods, wired with 3000K Ra95 152W 14592lm led source for direct light and 56W 5376lm for indirect light.**

**240V 50-60Hz power supply included.**

**finishes: bianco V.**



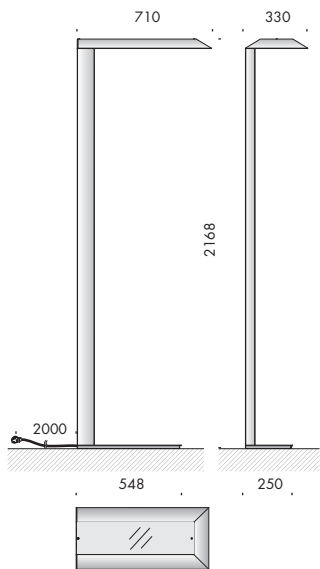

16.64 terra 01

240V 50-60Hz


IP20



Vb4.090.01 bianco V

3000K l.i. 72W 31

**l.i. (luce indiretta · indirect light)**

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm	W	lm/W	
95	95	Rf 90	Rg 98	step 2	24	7200	72	100	<b>A+</b>
V3007.2	9	Ta25 °C		vita media · average life		50000 h	L80 B10		

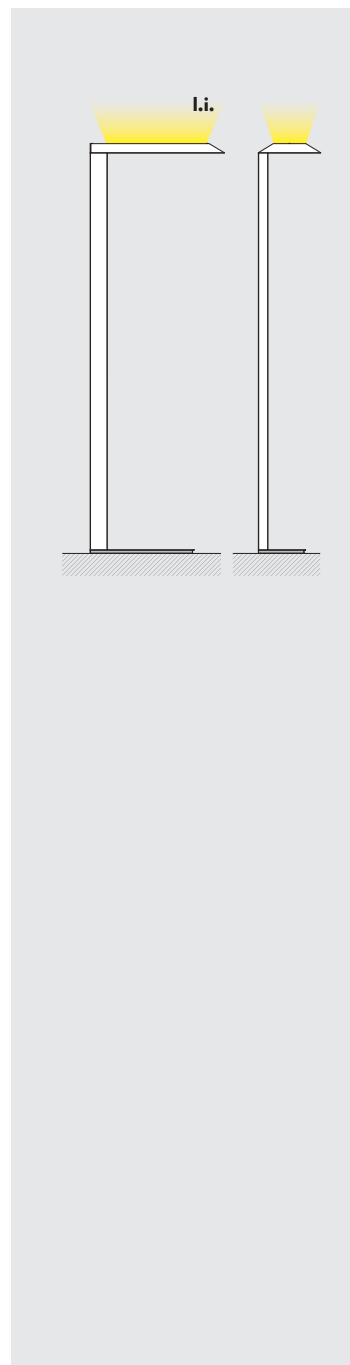

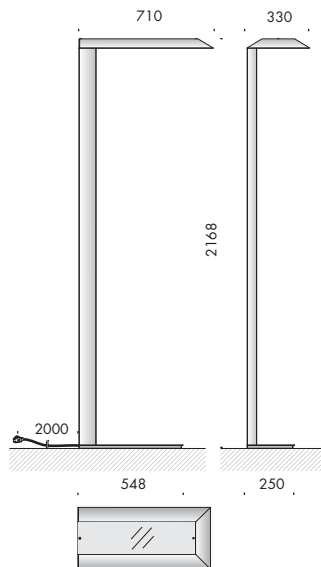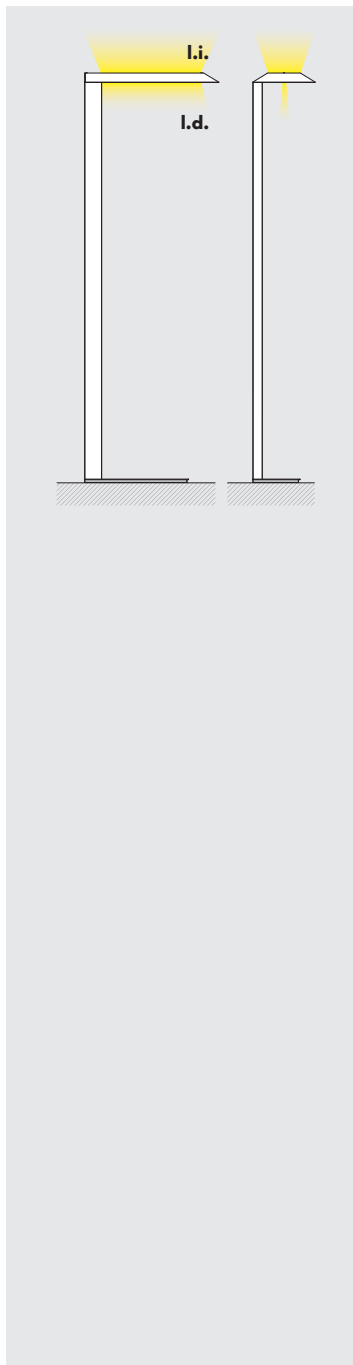

16.64 terra 02

240V 50-60Hz

IP20

Vb4.090.11 bianco V

3000K

l.d. 15W 31

l.i. 54W



**l.d. (luce diretta - direct light)**

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm	W	lm/W	
95	95	Rf 90	Rg 98	step 2	24	1500	15	100	<b>A+</b>
V3007.3	9		Ta25 °C		vita media · average life		50000 h	L80 B10	

**l.i. (luce indiretta - indirect light)**

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm	W	lm/W	
95	95	Rf 90	Rg 98	step 2	24	5400	54	100	<b>A+</b>
V3007.4	9		Ta25 °C		vita media · average life		50000 h	L80 B10	

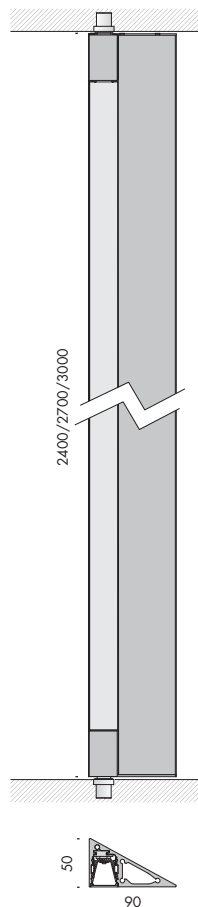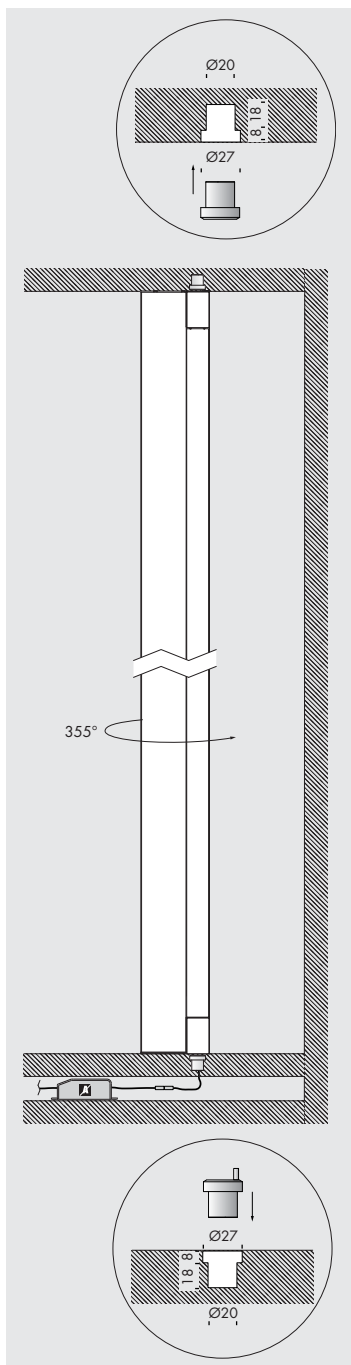


**16.64 terra soffito**
**24Vdc**


**IP40**




<b>Vb4.090.21</b>	bianco V	3000K	31W	2400mm	10
<b>Vb4.090.23</b>	bianco V	3000K	35W	2700mm	10
<b>Vb4.090.25</b>	bianco V	3000K	39W	3000mm	11

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	<b>A+</b>
V3001	11		Ta25 °C	vita media · average life	50000 h	L80	B10		

**accessori. accessories.**


<b>Vb9.090.96</b>	boccola · bushing	2 pz · pcs	0,08
-------------------	-------------------	------------	------

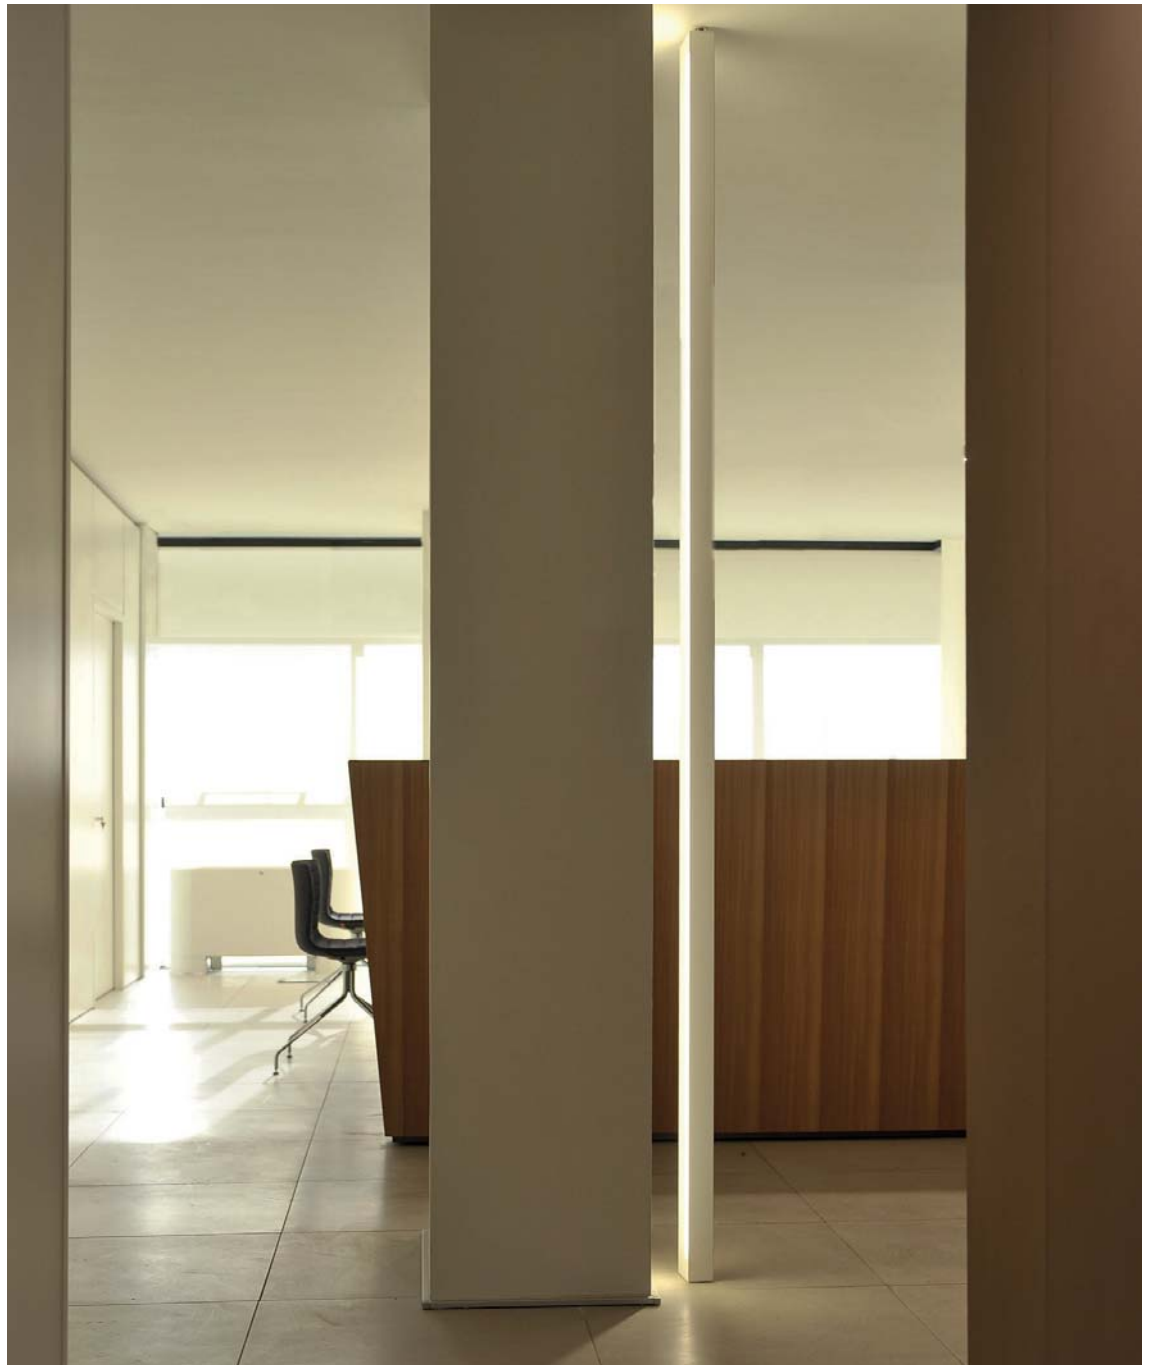

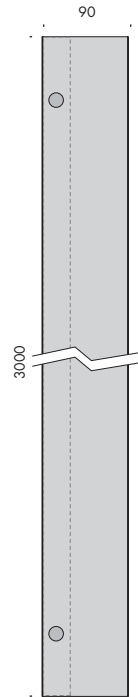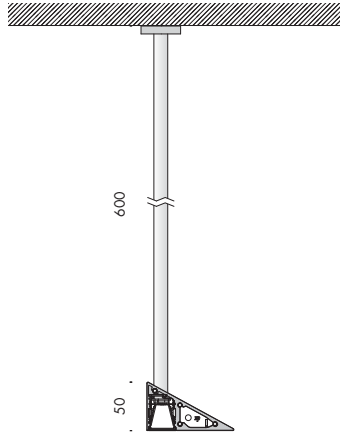

16.64 sospensione 01

240V 50-60Hz

IP40

CE

Vb8.090.51 bianco V

3000K

76W

12

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	<b>A+</b>
V3001	<sup>11</sup>		Ta25 °C	vita media · average life	50000 h	L80	B10		

**16.64 sospensione 02**

240V 50-60Hz



IP40



CE

**Vb8.090.41** bianco V

3000K l.d. 152W 23


l.i. 56W

**I.d. (luce diretta · direct light)**


Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	<b>A+</b>
V3001	11		Ta25 °C		vita media · average life 50000 h		L80 B10		

**I.i. (luce indiretta · indirect light)**

Ra	R9	ies tm-30		sdc	V <sub>f</sub>	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	<b>A+</b>
V3001	11		Ta25 °C		vita media · average life 50000 h		L80 B10		

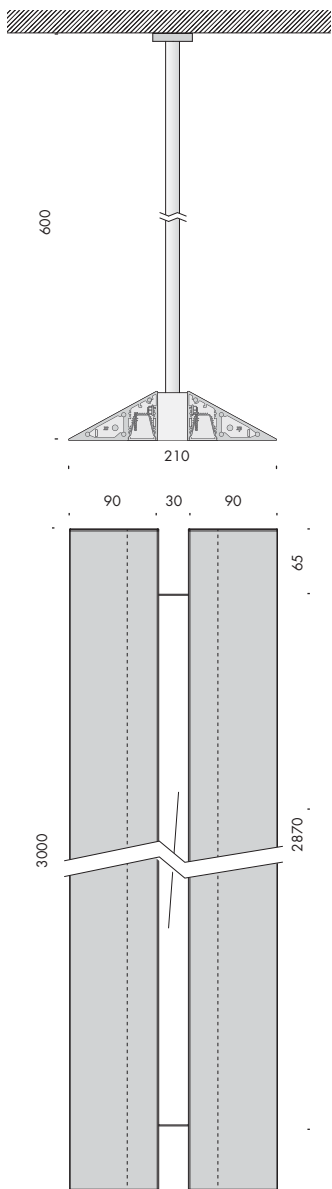



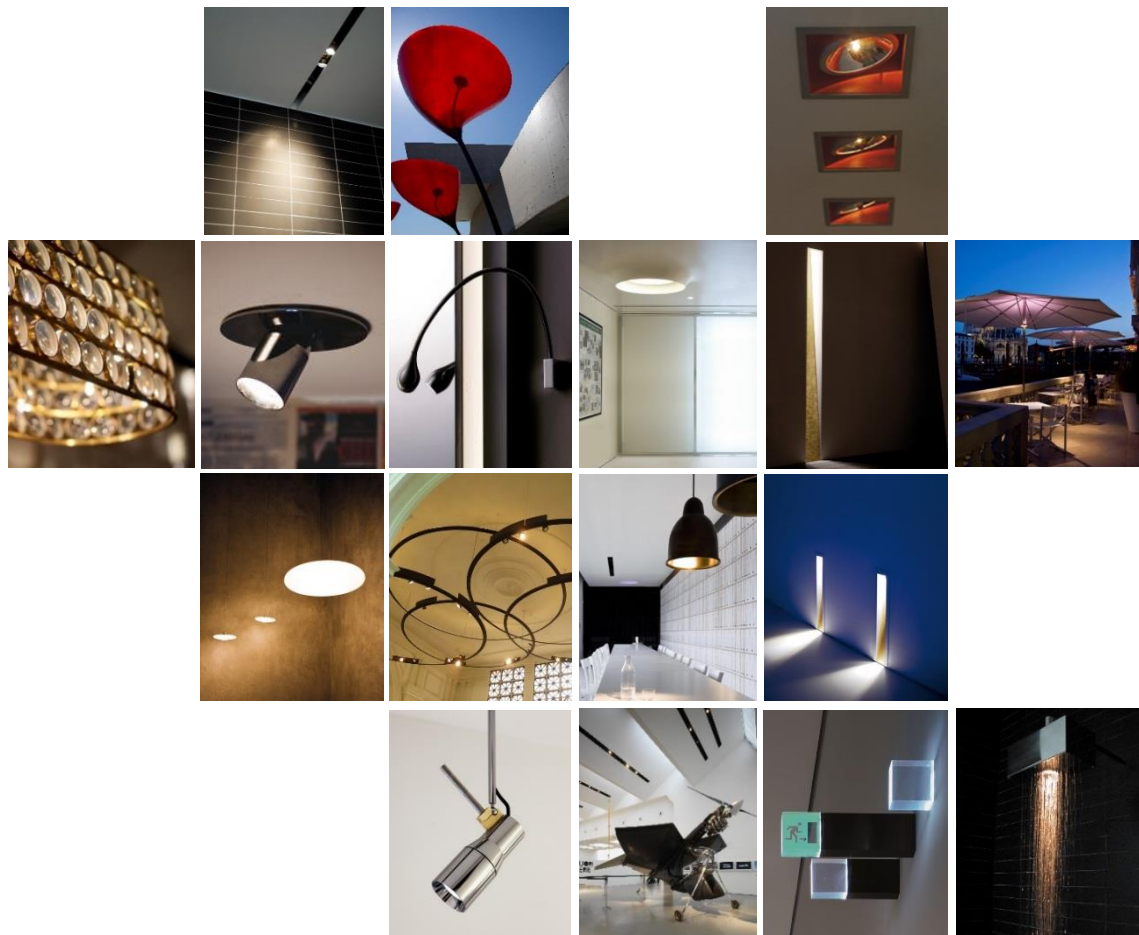

Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

